

IBOX-206 Plus

Intel Celeron J1900 Quad Core Processor
Fanless Industrial PC



Features:


- ◇ All aluminum structure, fanless design;
- ◇ Support Intel Celeron J1900 quad core processor;
- ◇ Max. Support DDR3L 8G RAM;
- ◇ Support 1*2.5" HDD;
- ◇ Support MSATA/WIFI/3G/4G (Choose one from four) ;
- ◇ Support 6*COM (COM2 RS232/485 Optional) ;
- ◇ Support OS:



Specification

Model	IBOX-206 Plus
Color	Grey (Color can be customized)
Material	High-quality all aluminum, surface anodic oxidation
Processor	Onboard Intel Celeron J1900 (Quad core quad threading, 1.99G, TDP: 10W) ;
RAM	Support 1*DDR3L 1333/1600MHz SODIMM RAM Slot, Max. Support 8GB
BIOS	AMI UEFI BIOS
Display Chip	Integrated Intel HD Graphics
Display Port	1*VGA, 1*HDMI (Support synchronous and asynchronous dual display)
Front I/O	4*USB2.0, 1*COM, 1*Power Switch ;
Rear I/O	4*USB2.0, 5*COM (COM2 RS232/485 Optional) , 2*1000M LAN, 1*VGA, 1*HDMI, 2*PS/2, 1*DC Input, 1*Mic, 1*Line Out, 1*Parallel
Expansion Slot	Support 1*MINI PCIE Slot (MSATA/WIFI/3G/4G Optional) , Embedded SIM slot; Optional Ports: GPIO (Standard version doesn't include GPIO port)
Network	2*RTL8111E 10/100/1000M LAN
Storage	Support 1*MSATA Slot, 1*2.5"HDD
Input Voltage	Support DC 12V Input
Other Function	Auto power on when there is electricity, Timing boot, Wake on LAN, PXE boot, Watchdog (0~255 level) (Standard version doesn't set these function)
Work Temp	0°C ~ +50°C (Commercial HDD) , -20°C ~ +60°C (Industrial SSD) , Surface air flow
Work Humidity	0% ~ 95% non-condensing
Certificates	CE, CCC, FCC Class A, ROHS
Dimension	234 * 200 * 64.5mm
Net Weight	2.0 kg
Application	Industrial Automation, Medical, Logistics Transportation, Warehouse, Electronic Education etc.

IBOX-206 Plus Drawing

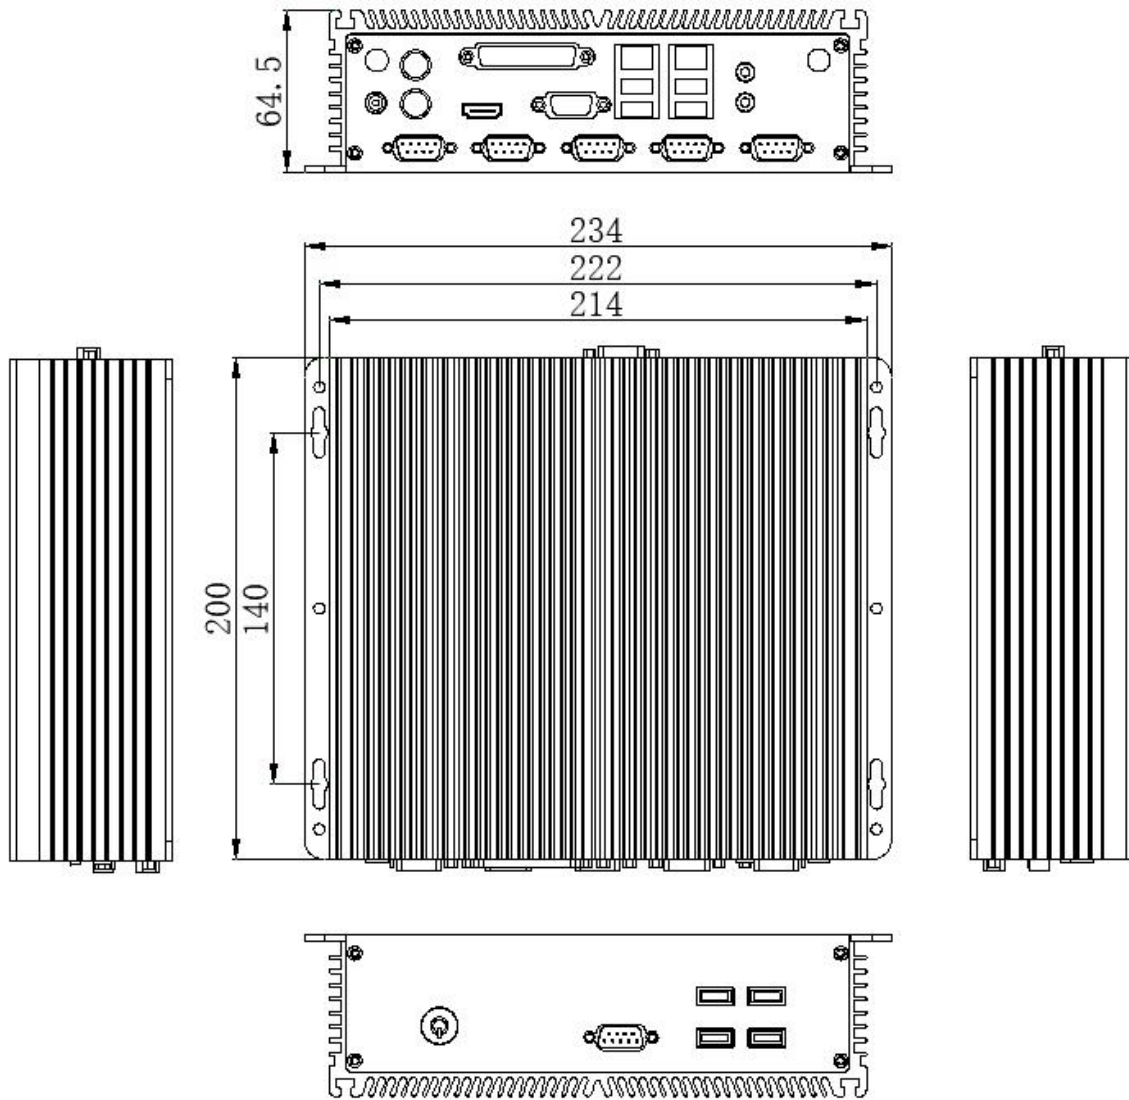

Accessories List

Name	Quantity	Specification
Power Adapter	1	12V 5A
Power Cord	1	Any Plug Optional (China, US, EU, UK etc.)
CD Driver	1	Neutral

Order Information

Configuration 1	IBOX-206 Plus	Intel Celeron J1900	Standard Port (6*RS232)
Configuration 2		Intel Celeron J1900	Standard Port (1*RS485, 5*RS232)